



DARK KNIGHT NUUK 30'' LED BAR/DUAL POSITION LIGHT/E-APPROVED



Voltage	9-36V DC
Consumption	154W
Theoretical lumen	17 100
Actual lumen	14 200
1 Lux @	481
IP-class	IP68/69K
Beam pattern	Combo
Position light	White and amber
Connection	Cable
Cable length	2500mm

Material housing	Aluminium
Material lens	Polycarbonate
Length	758 mm
Depth	69,8 mm
Height	38,5 mm
Height including bracket	51,3 mm
Operating temperature	-40°C - +60°C
E-approved	ECE R7, R112
Ref	50
EMC-certificate	ECE R10



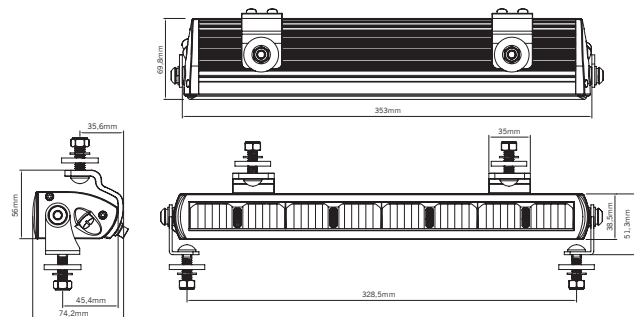


DARK KNIGHT NUUK 14''


LED BAR/DUAL POSITION LIGHT/E-APPROVED



Voltage	9-36V DC
Consumption	67W
Theoretical lumen	7600
Actual lumen	6500
1 Lux @	357
IP-class	IP68/69K
Beam pattern	Combo
Position light	White and amber
Connection	DT4
Cable length	500mm

Material housing	Aluminium
Material lens	Polycarbonate
Length	353 mm
Depth	69,8 mm
Height	38,5 mm
Height including bracket	51,3 mm
Operating temperature	-40°C - +60°C
E-approved	ECE R7, R112
Ref	27,5
EMC-certificate	ECE R10



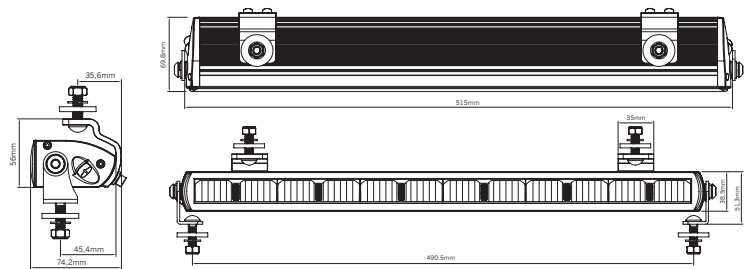

DARK KNIGHT NUUK 20'' LED BAR/DUAL POSITION LIGHT/E-APPROVED



Voltage	9-36V DC
Consumption	94W
Theoretical lumen	11 400
Actual lumen	9500
1 Lux @	452
IP-class	IP68/69K
Beam pattern	Combo
Position light	White and amber
Connection	DT4
Cable length	500mm

Material housing	Aluminium
Material lens	Polycarbonate
Length	515 mm
Depth	69,8 mm
Height	38,5 mm
Height including bracket	51,3 mm
Operating temperature	-40°C - +60°C
E-approved	ECE R7, R112
Ref	40
EMC-certificate	ECE R10

