

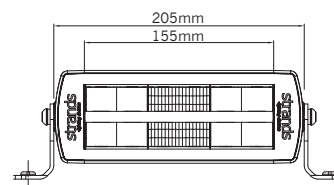


strands®

-lighting division




SIBERIA UDX 8'' LED BAR AMBER AND WHITE POSITION LIGHT




Voltage	10-32 V DC
Consumption E-mode	32 W
Xperience mode	66 W
Theoretical lumen	7167
Actual lumen: E-mode	2788
Xperience mode	5758
1 lux @ E-mode	327 m
Xperience mode	464 m
IP-class	IP67/IP69K
Beam pattern	Combo
Position light	White and amber
Connection	DT-4

Cable length	500 mm
Material housing	Aluminium
Material lens	Polycarbonate
Length	205 mm
Depth	71,6 mm
Height	76 mm
Height including bracket	89 mm
Operating temperature	-30°C - +65°C
E-approved	ECE R148, R149
Ref: E-mode	25
EMC-certificate	ECE R10

E-MODE




XPERIENCE MODE




strands®


-lighting division

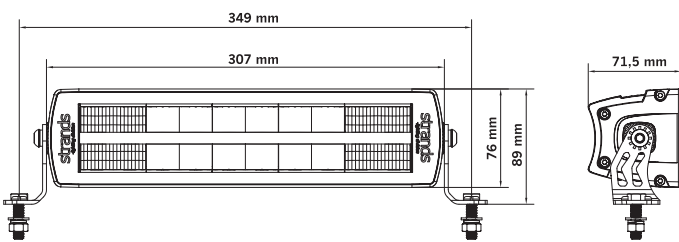

E-MODE

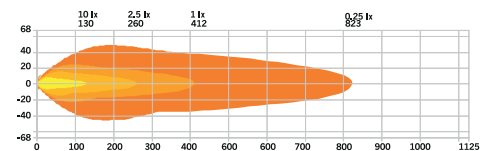

XPERIENCE MODE

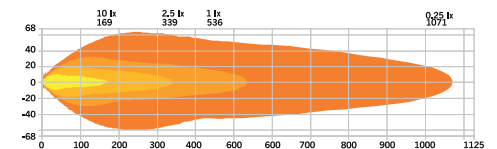

SIBERIA UDX 12'' LED BAR WHITE AND AMBER POSITION LIGHT



XPERIENCE-MODE

Consumption 110W
Actual lumen 8000 lm
1 lux @ 536 m

E-MODE

Consumption 61W
Actual lumen 4370 lm
1 lux @ 412 m

Voltage 10-32V DC
Color temperature 5700K
Beam pattern Extended beam
IP-Class IP68/IP69K
Color lens Clear
Color LED White and amber
Position light White and amber
Connection DT-4
Cable length 600 mm
Material housing Aluminium

Material lens Polycarbonate
Length 307 mm
Depth 71,5 mm
Height 76 mm
Height including bracket 89 mm
Operating temperature -30°C - +65°C
E-approved ECE R112, R7
Ref 45
EMC-certificate ECE R10

Part No. 809162