strands®
-lighting division

MANUAL

STRANDS DIRECTIONAL WARNING LIGHT 3 LED

RED: To +VDC (use 2A fuse)
BLACK: To Chassis Ground
WHITE: For Simultaneous or Alternating Flash

Group 1 Heads: (Wiring: WHITE connected to RED) will flash together.

Group 2 Heads: (Wiring: WHITE NOT connected to RED) will flash together.

Note: Group 1 Heads will alternate with Group 2 Heads.

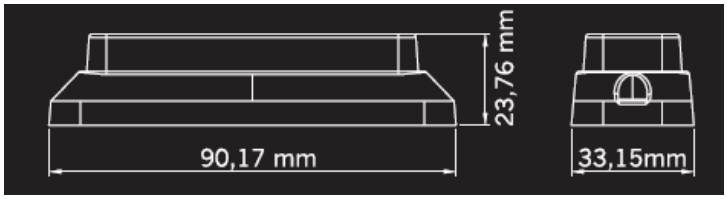

YELLOW: For Synchronization & Flash Patterns
Connect YELLOW wires of all heads together for synchronization.
Note: All heads must be set to the same pattern.

Momentarily apply +VDC to the YELLOW wire:
Once: For the next pattern.
Hold 5 seconds: For the factory default pattern.
Note: This unit may not be factory set at pattern 0.

ID	Pattern Name	ID	Pattern Name
0	Random (all)	6	Quad Flash 75
1	Steady	7	Quint Flash 75
2	Single Flash 120 (R65)	8	8 Flash Flash 75
3	Mega	9	Single-Quad
4	Double Flash 75	10	Single H/L
5	Triple Flash 75	11	Single-Triple-Quint

READ THIS BEFORE INSTALLATION
READ ALL INSTRUCTIONS AND STUDY DIAGRAMS BEFORE INSTALLING YOUR NEW LIGHTS!

LEGAL MOUNTING

Check with state or local authorities for laws governing usage and proper mounting of your new lights.

TAKE CARE OF YOUR PRODUCT

Keep the product clean. Dirt may shorten the products lifetime.

We recommend using lukewarm water and alkaline degreasing.
Follow the degreasing instructions carefully and rinse off gently with cold or lukewarm water on low pressure.

WARNING!
Strong chemicals should not be used on the product. If you accidently get strong chemicals on the product, rinse off immediately, use plenty of water so that no chemicals remain in any joint.
Some chemicals have a small amount of solvent in them, this can dissolve sealing adhesives and compromise the product's waterproofness.
Some chemicals pull out liquid from plastic and rubber-based components, which makes the plastic or rubber brittle and bursts more easily.
Be careful not to use high water pressure close up on the product.
If you use high water pressure at short distances, most products find it difficult to close out the water.

INSTALLATION
If there is a contact/connector on the product, it should not be cutted. If the connector is cut, the warranty is not valid.

If the product has loose cable and no connector. If the cable is shorter than 50 cm, the cable must not be cutted. If the cable is cut, the warranty is not valid.
If the cable is longer than 50 cm, it is ok to shorten the cable, but not shorter than 50 cm.
If the cable is cut shorter than 50 cm, the warranty is not valid.

WARNING!
Do not use higher volts than the product description states.
This light becomes hot under continuous use. Don´t remove or touch the casing for at least 30 minutes after turning the lamp off.

Part no. 850155HP-A , 850155HP-B, 850155HP-R

Contact us if you need support: support@strands.se or +46(0)320-450450

FUNCTION 3 YEARS WARRANTY

www.strands.se
www.strandseurope.com